



GUANGDONG QIKE ELECTRONICS CO., LTD

广东齐克电子有限公司

Dsign Light LED

Commercial & Residential Light

Manufacturer Since 2004

D-Sign Light Co., Ltd.

Address: 353/101 moo 12, Pratumnak soi 5,
Nongprue, Banglamung, Pattaya, 20150 Chonburi

Website: www.dsignlight.com

Contact: Ralf Skoropa

Email: ralf@skoropa.com

Mobile: +66 868 43 8511

COMPANY PROFILE



D-Sign Light Co., Ltd. is a professional high-tech enterprise specialized in the LED lighting products. Founded in 2004, we have developed a set of strict management system under the standards of KS QISO 9001:2015. Thinking highly of LED lighting products research and development, production, sales and service, we are always committed to promote a win-win business cooperation with customers.

- Experienced R&D and production team

Covers 30,000m² factory, the workshop staff of more than 200 and over 10 professional engineers in China.

- Strong manufacturing capacity



Owns advanced automated production machines, such as SMT machines, EMC and surge testing machines, aging testing, IES and integrating sphere etc.

- Top brand authorization in the world

Strategic partner with Philips lumileds, US bridgelux and Korea Seoul.

Main markets, such as South Korea, North America, Europe and Southeast Asia.

We start with cooperation, be loyal to service.

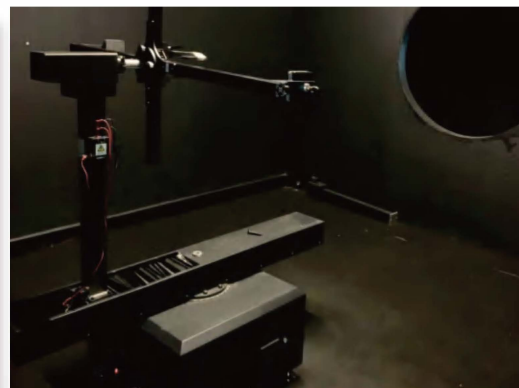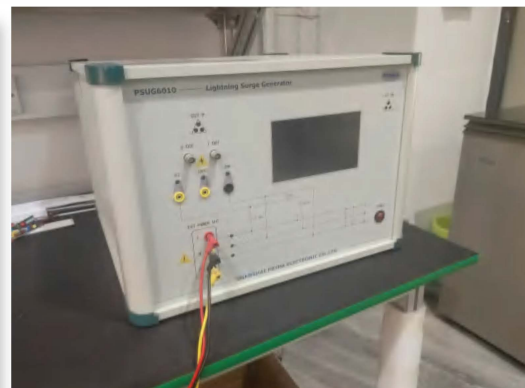

Company Philosophy


LIKE WATER, LIKE LIGHT, LIKE SUN!
Benefit everything, shine forever.

Vision: Be Top Brand of LED Commercial Lighting in the world.

Core Values: Be based on honesty, quality is life.
Innovation seeks development and win-win creates the brilliance.

Quality Policy: High standards, strict requirements,
attention to details. Professional, dedicated, serve attentively!

Sincerely welcome to visit Guangdong QIKE in China.

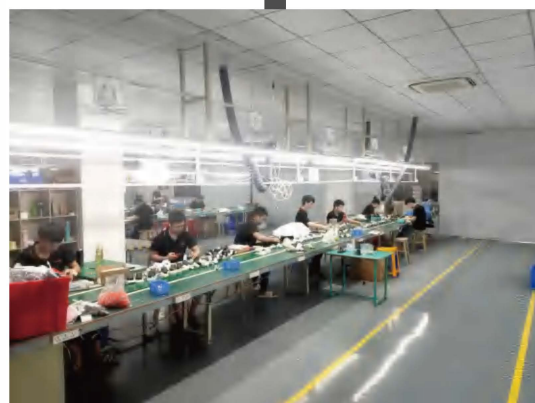

STRATEGIC PARTNERS





DOWN LIGHTS



Colour(s)	
Textured Black	
Textured White	
Specifications	
Material	Die cast aluminum
Luminous Efficacy	100LM / W
CCT	3000K / 4000K / 5700K / 6500K
IP	IP20
Ambient temperature	-20°C ~ +50°C
Driver	AC100-240V 50/60Hz AC160-240V 50/60Hz
LEDS	SMD 2835
CRI(typ.)	80
PF	≥ 0.9
Warranty	3 Years
Safety Class	II

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire


Areas of application	
- Public areas	
- Stairways	
- Corridors	
- Foyers	
- Shops	

Product advantages	
-High luminous efficacy.	
-Direct replacement for compact fluorescent lamp down lights.	
-Energy savings up to 80% (compared to luminaires that use CFL lamps)	
-Very homogenous light.	
-Functional design.	
-Easy installation with fast connection.	
-External driver for extended flexibility.	



DOWN LIGHTS




	Model	Watt	LEDS	Driver	DxH(mm)	⌀ Cut-out	CCT	Beam angle
	QK-TD-CMD-7W	7W	SMD 2835	AC165-265V	Ø100*35mm	Ø75mm	● 3000K ● 4000K 6500K	120°
	QK-TD-CMD-10W	10W			Ø130*40mm	Ø100mm		
	QK-TD-CMD-15W	15W			Ø150*45mm	Ø120mm		
	QK-TD-CMD-20W	20W			Ø175*50mm	Ø150mm		
	QK-TD-CMD-30W	30W			Ø200*60mm	Ø175mm		
	QK-TD-CMD-35W	35W			Ø230*65mm	Ø200mm		



DOWN LIGHTS




	Model	Watt	LEDS	Driver	DxH(mm)	⌀ Cut-out	CCT	Beam angle
	QK-TD-LMD-7W	7W	COB	AC165-265V	Ø88*40mm	Ø75mm	● 3000K ● 4000K 6500K	120°
	QK-TD-LMD-12W	10W			Ø120*45mm	Ø100mm		
	QK-TD-LMD-20W	15W			Ø165*45mm	Ø140mm		
	QK-TD-LMD-30W	30W			Ø223*46mm	Ø190mm		



DOWN LIGHTS






Model	Watt	LEDS	Driver	DxH(mm)	⌀ Cut-out	CCT	Beam angle
QK-DL-DXTD-7	7W	SMD 2835	AC85-265V AC165-265V	Ø90*45mm	Ø70mm	● 3000K ● 4000K ● 6500K	45°
QK-DL-DXTD-10	10W			Ø105*65mm	Ø85mm		
QK-DL-DXTD-15	15W			Ø130*68mm	Ø105mm		
QK-DL-DXTD-20	20W			Ø165*90mm	Ø140mm		
QK-DL-DXTD-30	30W			Ø185*95mm	Ø165mm		
QK-DL-DXTD-40	40W			Ø220*105mm	Ø200mm		



DOWN LIGHTS






Model	Watt	LEDS	Driver	DxH(mm)	⌀ Cut-out	CCT	Beam angle
QK-TD-BM-7W	7W	SMD 2835	AC165-265V	Ø90*55mm	Ø75mm	● 3000K ● 4000K ● 6500K	24°
QK-TD-BM-12W	12W			Ø110*60mm	Ø95mm		



DOWN LIGHTS




	Model	Watt	LEDS	Driver	DxH(mm)	Cut-out	CCT	Beam angle
	QK-JD-12W	12W	SMD 2835	AC165-265V	Ø104*60mm	Ø95mm	● 3000K ● 4000K ● 6500K	15/24/36°



DOWN LIGHTS




	Model	Watt	LEDS	Driver	DxH(mm)	Cut-out	CCT	Beam angle
	QK-QM-12W	12W	SMD 2835	AC165-265V	Ø110*54mm	Ø95mm	● 3000K ● 4000K ● 6500K	15/24/36°



DOWN LIGHTS




	Model	Watt	LEDS	Driver	DxH(mm)	Cut-out	CCT	Beam angle
	QK-DL-YD-12W	12W	SMD 2835	AC165-265V	Ø115*75mm	Ø95mm	● 3000K ● 4000K 6500K	15/24/36°




DOWN LIGHTS




	Model	Watt	Dimmable	Driver	DxH(mm)	Cut-out	CCT	Beam angle
	QK-TD-DD-5WL	5W	Triac	AC165-265V	Ø83*48mm	Ø75mm	● 3000K ● 4000K 6500K	60°
	QK-TD-DD-7WL	7W			Ø83*48mm	Ø75mm		
	QK-TD-DD-12WL	12W			Ø103*63mm	Ø95mm		
	QK-TD-DD-15WL	15W			Ø123*74mm	Ø115mm		



WATERPROOF DOWNLIGHT

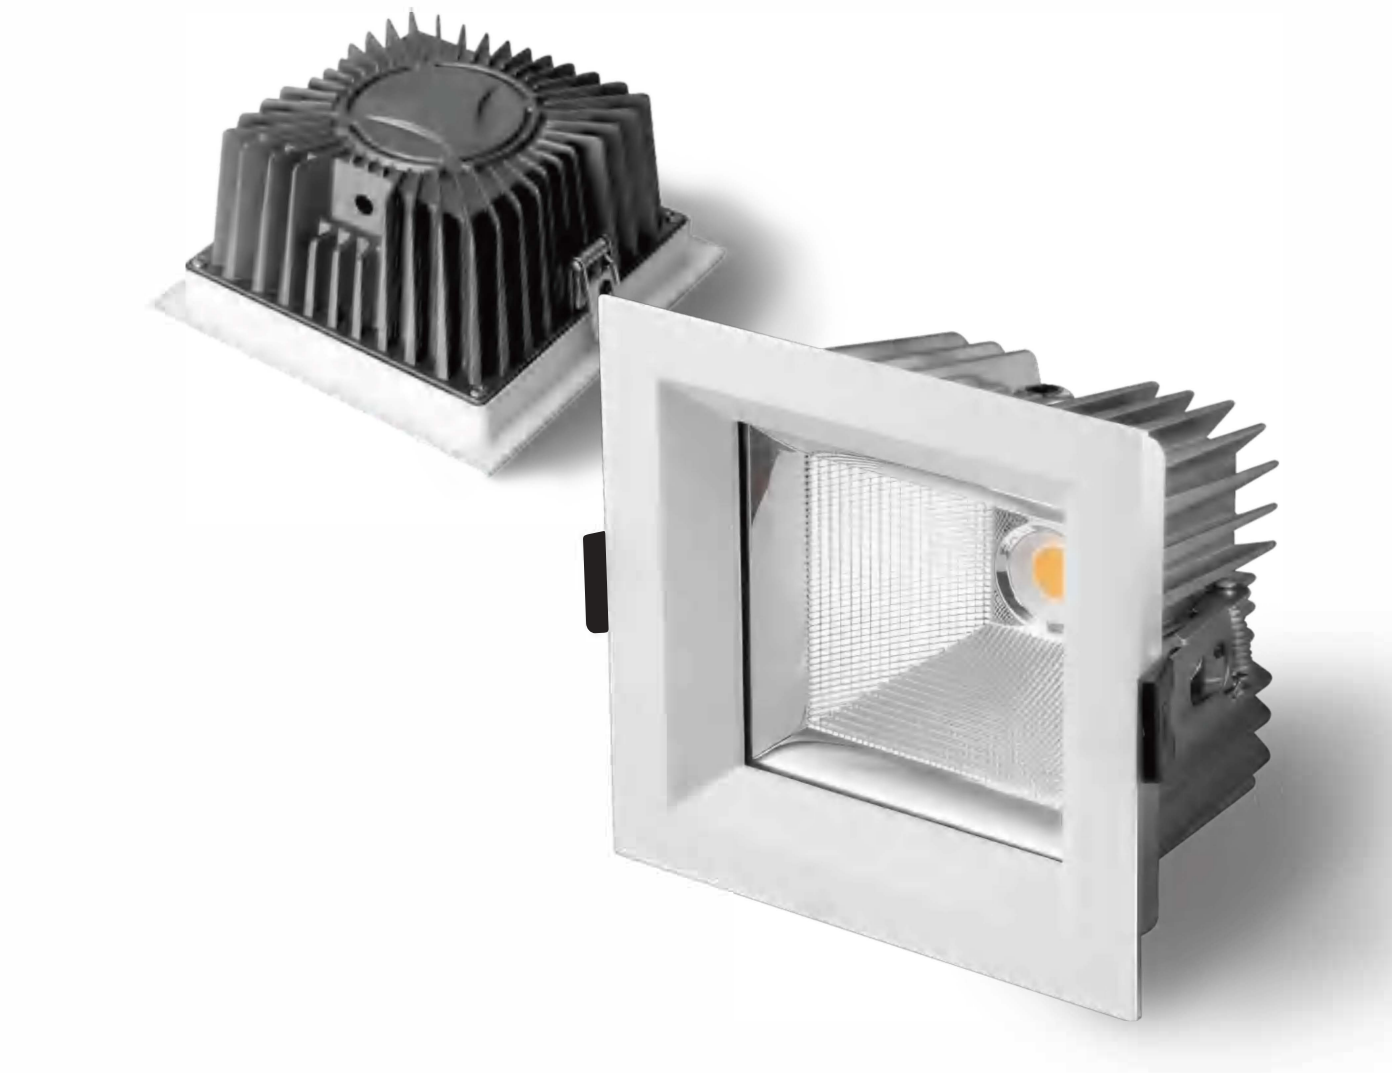




Model	Watt	LEDS	Driver	DxH(mm)	⌀ Cut-out	CCT	Beam angle
QK-TD-FS-10W	10W	COB	AC100-240V	Ø110*60mm	Ø95mm	● 3000K	60°
QK-TD-FS-20W	20W			Ø130*70mm	Ø115mm	● 4000K	
QK-TD-FS-30W	30W			Ø165*80mm	Ø150mm	6500K	
QK-TD-FS-40W	40W			Ø225*90mm	Ø205mm		



WATERPROOF DOWNLIGHT





Model	Watt	LEDS	Driver	DxH(mm)	⌀ Cut-out	CCT	Beam angle
QK-TD-FD-10W	10W	COB	AC100-240V	Ø110*60mm	Ø95mm	● 3000K	60°
QK-TD-FD-20W	20W			Ø130*70mm	Ø115mm	● 4000K	
QK-TD-FD-30W	30W			Ø165*80mm	Ø150mm	6500K	
QK-TD-FD-40W	40W			Ø225*90mm	Ø205mm		





SURFACE MOUNTED DOWN LIGHT



Colour(s)	
Textured Black	
Textured White	
Specifications	
Material	Die cast aluminum
Luminous Efficacy	90LM / W
CCT	3000K / 4000K / 5700K / 6500K
IP	IP20
Ambient temperature	-20°C ~ +50°C
Driver	AC100-240V 50/60Hz AC160-240V 50/60Hz
LEDS	COB
CRI(typ.)	>80/90
Efficacy	90LM/W
Warranty	3 Years
Safety Class	II

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire


Areas of application	
- General illumination	
- Public areas	
- Stairways	
- Corridors	
- Foyers	
- Shops	



Product advantages	
-High luminous efficacy.	
-Direct replacement for compact fluorescent lamp down lights.	
-Energy savings up to 80% (compared to luminaires that use CFL lamps)	
-Very homogenous light.	
-Functional design.	
-Easy installation with fast connection.	

SURFACE MOUNTED DOWN LIGHT



	Model	Watt	LEDS	Driver	DxH(mm)	Material	CCT	Beam angle
	QK-MZTD-B-3	3W	COB	AC85-265V AC165-265V	Ø86*60mm	Alumium+PC	● 3000K ● 4000K 6500K	120°
	QK-MZTD-B-5	5W			Ø100*66mm			
	QK-MZTD-B-9	9W			Ø120*80mm			
	QK-MZTD-B-12	12W			Ø154*90mm			
	QK-MZTD-B-15	15W			Ø170*100mm			
	QK-MZTD-B-25	15W			Ø170*100mm			
		25W			Ø215*120mm			




SURFACE MOUNTED DOWN LIGHT



PRODUCT BENEFIT


- Keep the overall unity and perfection of architectural decoration, do not destroy the setting

	Model	Watt	LEDS	Driver	DxH(mm)	Material	CCT	Beam angle
	QK-TD-MZ-7W	7W	COB	AC165-265V 50/60Hz	Ø86*60mm	Die casting Aluminum	● 3000K ● 4000K 6500K	15/30/45°
	QK-TD-MZ-12W	12W			Ø75*100mm			
	QK-TD-MZ-15W	15W			Ø75*150mm			
	QK-TD-MZ-20W	20W			Ø95*150mm			
	QK-TD-MZ-25W	25W			Ø115*135mm			
	QK-TD-MZ-30W	25W			Ø115*135mm			
		30W			Ø115*160mm			



SURFACE MOUNTED DOWN LIGHT




	Model	Watt	LEDS	Driver	DxH(mm)	Material	CCT	Beam angle
	QK-TD-MZ-10W	15W	SMD 2835	AC165-265V 50/60Hz	Ø100*100mm	Die casting Aluminum	● 3000K ● 4000K 6500K	15/24/36°



SURFACE MOUNTED DOWN LIGHT



	Model	Watt	LEDS	Driver	DxH(mm)	Material	CCT	Beam angle
	QK-MZTD-R-10	10W	COB	AC165-265V 50/60Hz	Ø87*90mm	Alumium+PC	● 3000K ● 4000K 6500K	15/24/36°
	QK-MZTD-R-20	20W			Ø110*115mm			
	QK-MZTD-R-30	30W			Ø133*140mm			
	QK-MZTD-S-10	10W			90*90mm			
	QK-MZTD-S-20	20W			110*120mm			
	QK-MZTD-S-30	30W			130*135mm			





LED TRACK LIGHT



Beam angle



15°



24°



36°

Colour(s)

Textured Black
Textured White



Specifications

Material	Alumium+PC
Luminous Efficacy	90LM / W
CCT	3000K / 4000K / 5700K / 6500K
IP	IP20
Ambient temperature	-20°C ~ +50°C
Driver	AC85-265V AC165-265V
LEDS	COB
CRI	80
Efficacy	90LM/W
Warranty	3 Years
Safety Class	II

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire

Areas of application

- Automobile display
- jewelry star hotel
- high-end clubs
- cultural relics exhibition hall
- chain stores

Product advantages

- High-efficiency optical lens with low light loss and good illumination.
- Energy savings up to 80% (compared to luminaires that use CFL lamps)
- Very homogenous light.
- Functional design.
- Lightweight, simple, elegant, easy to install and replace.



LED TRACK LIGHT



Holder: 1XGu10


Holder : 2XGu10

Holder: 3XGu10

	Model	Watt	LEDS	Driver	Size(mm)	Material	Beam angle
	QK-GDD-A10	10W	COB	AC85-265V AC165-265V	Ø49*125*105*90mm	Alumium+PC	15/24/36°
	QK-GDD-A20	20W			Ø65*158*104*90mm		
	QK-GDD-A30	30W			Ø76*183*104*90mm		



LED TRACK LIGHT

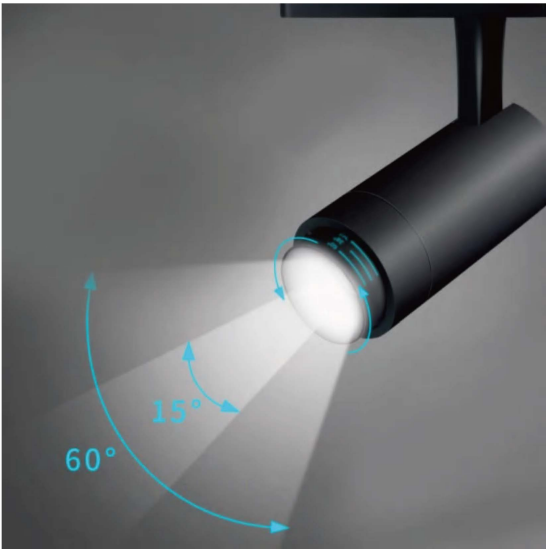

AREAS OF APPLICATION

- The track light is generally used as a special spot light.
- The general commercial majority, such as shopping malls, car display, jewelry, star hotels, brand clothing, high-end clubs, museum cultural relics exhibition hall, chain shopping malls, brand business hall, professional window, counters and other key lighting places.

	Model	Watt	LEDS	Driver	Size(mm)	Material	CCT
	QK-GDD-TJ-15	15W	COB	AC85-265V AC165-265V	Ø65*133*100*135mm	Alumium+PC	● 3000K
	QK-GDD-TJ-25	26W			Ø75*143*100*135mm		● 4000K
	QK-GDD-TJ-35	35W			Ø95*143*100*135mm		6500K







LINE LIGHTS



Colour(s)	
Textured Black	
Textured White	
Specifications	
Material	Alumium+PC
Luminous Efficacy	90LM / W
CCT	3000K / 4000K / 5700K / 6500K
IP	IP20
Ambient temperature	-20°C ~ +50°C
Driver	AC85-265V AC165-265V
LEDS	COB
CRI(typ.)	>80/90
Efficacy	90LM/W
Warranty	3 Years
Safety Class	II


This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire


- Areas of application**
- General illumination
 - Public areas
 - Stairways
 - Corridors
 - Foyers
 - Shops



- Product advantages**
- Low power consumption, long life, high brightness, easy to bend.
 - Clear lines, simple structure, beautiful appearance, strong and corrosion resistance.
 - Very homogenous light.
 - Functional design.
 - Easy installation with fast connection.

LINE LIGHTS

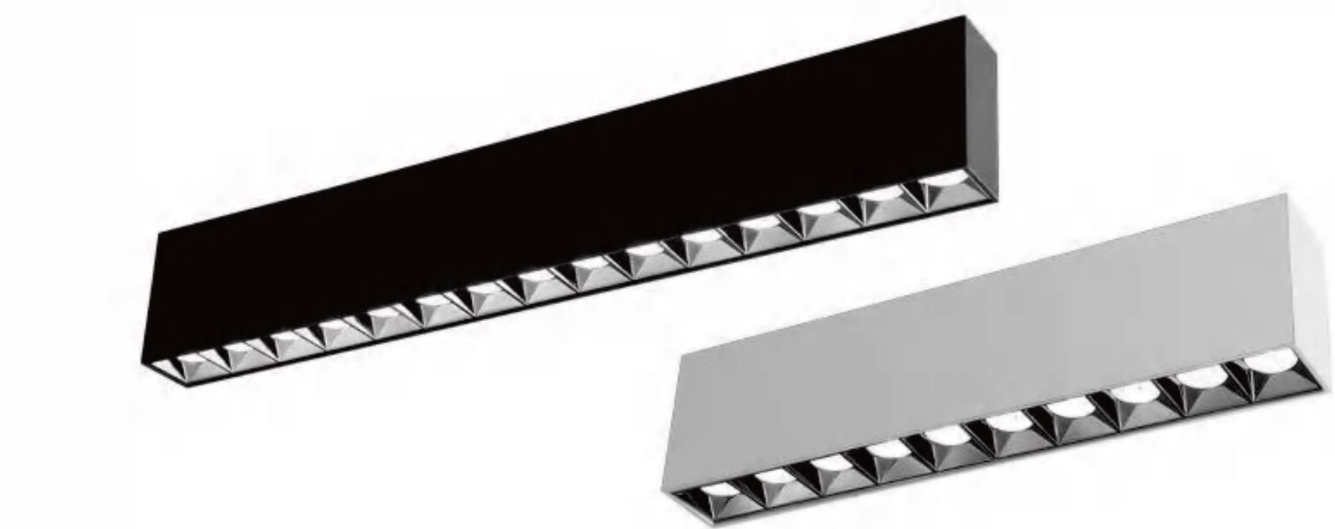




Model	Watt	Driver	DxH(mm)	Material	CCT	Beam angle
QK-XTD-MZ-4W	4W	AC85-265V 50/60Hz	65X66X35mm	Aluminum	● 3000K	15/30/45°
QK-XTD-MZ-10W	10W		137X66X35mm		● 4000K	
QK-XTD-MZ-20W	20W		270X66X35mm		● 6500K	
QK-XTD-MZ-30W	30W		402X66X35mm			



LINE LIGHTS

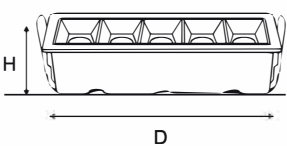

Model	Watt	Driver	DxH(mm)	⌀ Cut-out	Material	CCT	Beam angle
QK-XTD-QR-2W	2W	AC100-240V AC220-240V	45*45*50mm	37*37mm	Aluminum	● 3000K	15/30/45°
QK-XTD-QR-4W	4W		75*45*50mm	67*37mm		● 4000K	
QK-XTD-QR-10W	10W		147*45*50mm	139*37mm		● 6500K	
QK-XTD-QR-20W	20W		279*45*50mm	272*37mm			
QK-XTD-QR-30W	30W		411*45*50mm	403*37mm			



LINE LIGHTS



Model:QK-DXD-C01	30W
Model:QK-DXD-C02	30W
Model:QK-DXD-C03	30W
Model:QK-DXD-C04	30W
Model:QK-DXD-C05	40W
Model:QK-DXD-C06	30W
Model:QK-DXD-C07	40W



Type	Colour	Light Source	CCT	Lamp Material	Output Voltage	Size(mm)
Recessed	Silver	LED chip	 3000K	High quality aluminum PC material	AC85-265V	1200mm
	White		 4000K			
	Black		6500K			



LINE LIGHTS



Model:QK-DXD-B01	30W
Model:QK-DXD-B02	30W
Model:QK-DXD-B03	30W
Model:QK-DXD-B04	30W
Model:QK-DXD-B05	40W
Model:QK-DXD-B06	30W
Model:QK-DXD-B07	40W



Type	Colour	Light Source	CCT	Lamp Material	Output Voltage	Size(mm)
Suspend	Silver	LED chip	 3000K	High quality aluminum PC material	AC85-265V	1200mm
	White		 4000K			
	Black		6500K			



LINE LIGHTS



	Model	Watt	LEDS	Driver	Material	Size(mm)	CCT
	QK-XTD-DZ-18W	18W	SMD 2835	AC165-265V 50/60Hz	Iron+Pmma	1200*50*40mm	● 3000K ● 4000K 6500K
	QK-XTD-DZ-36W	36W				1200*70*40mm	
	QK-XTD-DZ-36W	48W				1200*200*60mm	
	QK-XTD-DZ-36W	60W				1200*250*60mm	
	QK-XTD-DZ-36W	72W				1200*300*60mm	



SURFACE MOUNTED LIGHTS



- 1. APP control
- 2. Remote control

3. Switch control

↓



Activate the light fixture.



Turn off the light fixture.



Activate night light mode.

	Model	Watt	Driver	DxH(mm)	Lumen	Material	CCT	Area
	QK-XDD-XD-18W	18W	AC85-265V 50/60Hz	300X50mm		Iron + PS cover	● 3000K	5-10m²
	QK-XDD-XD-36W	36W		400X50mm			● 4000K	10-15m²
	QK-XDD-XD-45W	45W		500X50mm			6500K	15-20m²
	QK-XDD-XD-54W	54W		600X50mm				20-25m²

SURFACE MOUNTED LIGHTS



- 1. APP control
- 2. Remote control

3. Switch control
↓



Activate the light fixture.



Turn off the light fixture.



Activate night light mode.

	Model	Watt	Driver	LxWxH(mm)	Lumen	Material	CCT	Area
	QK-XDD-XT-18W	18W	AC85-265V 50/60Hz	300X300X50mm	1440LM	Iron + PS cover	● 3000K	5-10m²
	QK-XDD-XT-36W	36W		400X400X50mm	2880LM		● 4000K	10-15m²
	QK-XDD-XT-45W	45W		500X500X50mm	3600LM		6500K	15-20m²
	QK-XDD-XT-54W	54W		600X600X50mm	4320LM			20-25m²



LED PANEL LIGHT

Colour(s)	
Textured Black	
Textured White	
Specifications	
Material	Alumium+PC
Luminous Efficacy	90LM / W
CCT	3000K / 4000K / 5700K / 6500K
IP	IP20
Ambient temperature	-20°C ~ +50°C
Driver	AC85-265V AC165-265V
LEDS	COB
CRI(typ.)	>80/90
Efficacy	90LM/W
Warranty	3 Years
Safety Class	II

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire

- Areas of application**
- General illumination
 - Public areas
 - Stairways
 - Corridors
 - Foyers
 - Shops



Product advantages

-LED panel light design is unique, light through high transmittance light guide plate to form a uniform plane luminous effect, good illumination uniformity, soft light, comfortable and bright, can effectively relieve eye fatigue.
-Good illumination uniformity, soft light, comfortable and bright, can effectively relieve eye fatigue.

LED PANEL LIGHT



	Model	Watt	LEDS	Driver	Size(mm)	Material	CCT
	QK-MBD-F	20W	SMD 2835	AC165-265V 50/60Hz	220*220mm	Plastic+PC	● 3000K
	QK-MBD-Y	18W			Ø205mm		● 4000K ● 6500K



LED PANEL LIGHT



	Model	Watt	LEDS	Driver	Size(mm)	Material	CCT
	QK-MBD-A	36W	SMD 2835	AC165-265V 50/60Hz	595*595*35mm	Aluminum+PS	● 3000K
	QK-MBD-Y	40W			595*595*35mm		● 4000K ● 6500K



LED PANEL LIGHT



	Model	Watt	LEDS	Driver	DxH(mm)	Ø Cut-out	Material	CCT
	QK-MBD-3W	3W	SMD 2835	AC85-265V	Ø85*20mm	Ø68mm	Plastic+PC	● 3000K
	QK-MBD-9W	9W			Ø148*20mm	Ø128mm		● 4000K
	QK-MBD-12W	12W			Ø170*20mm	Ø150mm		● 6500K
	QK-MBD-18W	18W			Ø220*20mm	Ø200mm		





LED TUBE LIGHT



Colour(s)	
Textured Black	
Textured White	
Specifications	
Material	Alumium+PC
Luminous Efficacy	90/100/120/150LM/W
CCT	3000K / 4000K / 6500K
IP	IP20
Ambient temperature	-20°C ~ +50°C
Driver	AC85-265V AC165-265V
LEDS	SMD 2835
CRI(typ.)	80
PF	≥ 0.9
Warranty	3 Years
Safety Class	II

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire


Areas of application	
- Public areas	
- Stairways	
- Corridors	
- Foyers	
- Shops	

Product advantages
-TUBE LIGHT Tube light can completely replace the traditional lamp with high.
-lumen 150LM/W, energy saving, high PF.
-Easy installation with fast connection.



LED TUBE LIGHT



	Model	Watt	LEDS	Driver	Size(mm)	THD	Beam Angle
	QK-T5-5	5W	SMD 2835	AC165-265V 50/60Hz	600mm	<15%	120°
	QK-T5-10	10W			900mm		
	QK-T5-14	14W			1200mm		
	QK-T5-18	18W			1200mm		



LED TUBE LIGHT



	Model	Watt	LEDS	Driver	Size(mm)	THD	Beam Angle
	QK-T8-10	10W	SMD 2835	AC165-265V 50/60Hz	600mm	<15%	120°
	QK-T8-14	14W			900mm		
	QK-T8-18	18W			1200mm		
	QK-T8-24	24W			1200mm		



LED TUBE LIGHT




	Model	Watt	LEDS	Driver	Size(mm)	THD
	QK-T8LD-10	10W	SMD 2835	AC85-265V AC165-265V	600mm	<15%
	QK-T8LD-14	14W			900mm	
	QK-T8LD-18	18W			1200mm	
	QK-T8LD-24	24W			1200mm	



LED TUBE LIGHT



	Model	Watt	LEDS	Driver	Size(mm)	THD
	QK-FL-T8-9	9W	SMD 2835	AC85-265V AC165-265V	600mm	<15%
	QK-FL-T8-13	13W			900mm	
	QK-FL-T8-18	18W			1200mm	



