



GUANGDONG QIKE ELECTRONICS CO., LTD

广东齐克电子有限公司

QIKE LED Landscape Lighting

Manufacturer Since 2004

D-Sign Light Co., Ltd.

Address: 353/101 moo 12, Pratumnak soi 5,
Nongprue, Banglamung, Pattaya, 20150 Chonburi

Website: www.dsignlight.com

Contact: Ralf Skoropa

Email: ralf@skoropa.com

Mobile: +66 868 43 8511



Company Profile

D-Sign Light Co., Ltd. is a professional high-tech enterprise specialized in the LED lighting products. Founded in 2004, we have developed a set of strict management system under the standards of KS Q ISO 9001:2015. Thinking highly of LED lighting products research and development, production, sales and service, we are always committed to promote a win-win business cooperation with customers.

- **Experienced R&D and production team**

Covers 30,000m² factory, the workshop staff of more than 200 and over 10 professional engineers in China.

- **Strong manufacturing capacity**

Owns advanced automated production machines, such as SMT machines, EMC and surge testing machines, aging testing, IES and integrating sphere etc.

- **Top brand authorization in the world**

Strategic partner with Philips lumileds, US bridgelux and Korea Seoul.

Main markets, such as South Korea, North America, Europe and Southeast Asia.

We start with cooperation, be loyal to service.



Company Philosophy

LIKE WATER, LIKE LIGHT, LIKE SUN!
Benefit everything, shine forever.

Vision: Be Top Brand of LED Commercial Lighting in the world.

Core Values: Be based on honesty, quality is life.
Innovation seeks development and win-win creates the brilliance.

Quality Policy: High standards, strict requirements,
attention to details. Professional, dedicated, serve attentively!

Sincerely welcome to visit Guangdong QIKE in China.



Strategic Partners





CONTENTS



01-06 LED SPIKE LIGHT



07-16 LED FLOOD LIGHT



17-24 UNDERGROUND LIGHT



25-30 LED WALL WASHER



31-44 GARDEN LIGHT



45-50 DECK LIGHT



51-56 POOL LAMP



LED SPIKE LIGHT

If you are thinking about adding garden lights to your outdoor landscape, spike lights are the best choice. Whether it is to light up your driveway, backyard or patio, it will be ideal for path lighting.

Casting onto trees, bushes, garden details or walls, it is IP65 rated and comes with a surface mount or spike accessory, making it a great LED garden luminaire for illuminating home entrances and paths.

QK-CDD-01




Parameter

- Input voltage: DC 12/24V AC 85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K~6000K
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
7W	Φ105*150*450		

IP65 IK08



60°

QK-CDD-02




Parameter

- Input voltage: DC 12/24V AC 85~265V
- LED: SMD
- Material: Die-cast aluminum
- CCT: 3000K~6000K
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
7W	Φ70*80*450		

IP65 IK08



5°



10°



20°



30°



60°

QK-CDD-03




Parameter

- Input voltage: DC 12/24V AC 85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K~6000K
- Finish color: Black/ Dark grey/ Light greyy

Power	A	B	C
5W	$\Phi 100 \times 90 \times 300$		
7W	$\Phi 100 \times 90 \times 300$		

IP65

IK08



QK-CDD-04





Parameter

- Input voltage: DC 12/24V AC 85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K~6000K
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
3W	$\Phi 43 \times 80 \times 230$		
7W	$\Phi 50 \times 80 \times 230$		

IP65

IK08

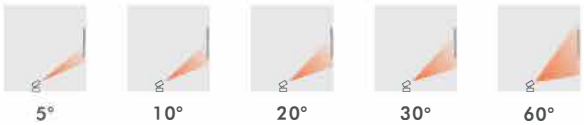

QK-CDD-05



QK-CDD-06




Parameter

- Input voltage: DC 12/24V AC 85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K~6000K
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
10W	Φ77*85*450		
20W	Φ98*95*450		
30W	Φ125*110*450		

IP65

IK08



60°


Parameter

- Input voltage: DC 12/24V AC 85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K~6000K
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
10W	Φ150*110*410		

IP65

IK08



60°



LED FLOOD LIGHT

In order to make the garden more vibrant and enhance the beauty of the green at night, we often place small spot floodlights under the trees, so that the plants shine at night.

According to the size of the plant, the difference of beam angles $10^{\circ}\sim 90^{\circ}$ and power for the floodlight will be selected, not only reflects the decorative sense of garden greening, but also achieves the lighting effect.


QK-CSD-01



- Parameter**
- Input voltage: AC85~265V
 - LED: SMD
 - CCT: 3000K~6000K/RGB/RGBW
 - Material: Die-cast aluminum + Tempered glass
 - Finish color: Black/ Dark grey/ Light grey

Power	A	B
9W	Φ155*H185	
18W	Φ185*H235	
24W	Φ205*H250	
36W	Φ230*H265	
50W	Φ285*H290	

IP65 IK08





QK-CSD-02



- Parameter**
- Input voltage: AC85~265V
 - LED: SMD
 - CCT: 3000K~6000K/RGB/RGBW
 - Material: Die-cast aluminum + Tempered glass
 - Finish color: Black/ Dark grey/ Light grey

Power	A	B
6W	Φ95*H120	
12W	Φ150*H160	
18W	Φ180*H160	
24W	Φ180*H210	
36W	Φ230*H320	

IP65 IK08

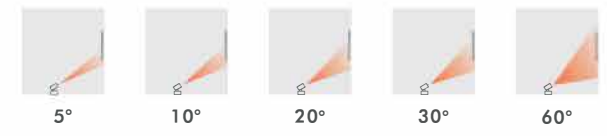

QK-CSD-03




Parameter

- Input voltage: AC85~265V
- LED: SMD
- CCT: 3000K~6000K
- Material: Die-cast aluminum + Tempered glass
- Finish color: Black/ Dark grey/ Light grey

Power	A	B
108W	Φ290*H330	
144W	Φ290*H330	

IP65 IK08



QK-CSD-04




Parameter

- Input voltage: AC85~265V
- LED: COB
- CCT: 3000K~6000K
- Material: Die-cast aluminum
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
30W	125*125*176		
54W	160*160*212		
96W	200*200*240		

IP65 IK08



QK-CSD-05

QK-CSD-06




Parameter

- Input voltage: AC85~265V
- LED: COB
- CCT: 3000K~6000K
- Material: Die-cast aluminum
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
5W	65*65*80		
10W	90*90*100		
20W	120*120*120		
30W	150*150*140		

IP65

IK08



60°


Parameter

- Input voltage: AC85~265V
- LED: COB
- CCT: 3000K~6000K
- Material: Die-cast aluminum
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
10W	Φ85*125*150		
20W	Φ120*125*220		
30W	Φ170*195*280		
140	Φ210*200*320		

IP65

IK08



60°


QK-CSD-07



Parameter

- Input voltage: AC85~265V
- LED: SMD
- CCT: 3000K~6000K
- Material: Die-cast aluminum
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
3*1W	Φ85*100*170		
3*3W	Φ85*100*170		
6*1W	Φ125*140*220		
6*3W	Φ125*140*220		



5°



10°



20°



30°



60°

IP65

IK08


QK-CSD-08



Parameter

- Input voltage: AC85~265V
- LED: SMD
- CCT: 3000K~6000K
- Material: Die-cast aluminum
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
36*3W	198*244*194		
60*3W	244*304*243		
120*3W	350*367*347		
36*10W	350*367*347		



5°



10°



20°



30°



60°

IP65

IK08

QK-CSD-09


QK-CSD-10



Parameter

- Input voltage: AC85~265V
- LED: SMD
- CCT: 3000K~6000K
- Material: Die-cast aluminum
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
24W	170	60	85
36W	189	65	85
60W	230	68	120




IP65

IK08

Parameter

- Input voltage: AC85~265V
- LED: SMD
- CCT: 3000K~6000K
- Material: Die-cast aluminum
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
9*3W	170	63	85
12*3W	189	68	85
18*3W	230	71	120





UNDERGROUND LIGHT

Underground light are mainly used for outdoor landscape lighting, such as plaza, walkway, villa garden and balcony, which is a good way to light up for decoration.

Small size, high power. Buried installation, no fear of impact, waterproof.

QK-DMD-01



QK-DMD-02




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- CCT: 3000K~6000K/RGB/RGBW
- Material: Die casting aluminum lamp body
304 stainless steel ring
Tempered glass diffuser
Engineering plastic recessed box
Silicone gasket

Power	A	B
1W	Φ65*80	
3W	Φ80*72	
6W	Φ100*85	
9W	Φ120*90	
18W	Φ160*95	

IP65 IK08




Parameter

- Input voltage: AC85~265V/DC24V
- LED: COB
- CCT: 3000K~6000K/RGB/RGBW
- Material: Die casting aluminum lamp body
304 stainless steel ring
Tempered glass diffuser
Engineering plastic recessed box
Silicone gasket

Power	A	B
3W	Φ100*85	
7W	Φ120*90	
10W	Φ150*95	
20W	Φ180*95	

IP65 IK08



QK-DMD-03




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- CCT: 3000K~6000K/RGB/RGBW
- Material: Die casting aluminum lamp body
304 stainless steel ring
Tempered glass diffuser
Engineering plastic recessed box
Silicone gasket

Power	A	B	C
5W	200	80	55
8W	350	90	80
10W	600	90	80
12W	1000	90	80
18W	1000	90	80
24W	1000	90	80

IP65

IK08



QK-DMD-04




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- CCT: 3000K~6000K/RGB/RGBW
- Material: Die casting aluminum lamp body
304 stainless steel ring
Tempered glass diffuser
Engineering plastic recessed box
Silicone gasket

Power	A	B	C
4*1W	L95	W95	H70
5*1W	L120	W120	H70
9*1W	L150	W150	H70
12*1W	L180	W180	H70
18*1W	L200	W200	H70
20*1W	L220	W220	H70
36*1W	L250	W250	H70

IP65

IK08



QK-DMD-05




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- CCT: 3000K~6000K/RGB/RGBW
- Material: Die casting aluminum lamp body
304 stainless steel ring
Tempered glass diffuser
Engineering plastic recessed box
Silicone gasket

Power	A	B
3*1W	120*200	
6*1W	150*200	
9*1W	180*245	
12*1W	180*245	
18*1W	200*245	
24*1W	250*310	
36*1W	320*240	

IP65

IK08



QK-DMD-06




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- CCT: 3000K~6000K/RGB/RGBW
- Material: Die casting aluminum lamp body
304 stainless steel ring
Tempered glass diffuser
Engineering plastic recessed box
Silicone gasket

Power	A	B
3W	Φ100*125	
5W	Φ120*125	
6W	Φ150*125	
9W	Φ180*125	
12W	Φ180*125	
18W	Φ200*125	

IP65

IK08



QK-DMD-07



Parameter




- Input voltage: AC85~265V/DC24V
- LED: GU10/MR16 bulb
- CCT: 3000K~6000K
- Material: Die casting aluminum lamp body
304 stainless steel ring
Tempered glass diffuser
Engineering plastic recessed box
Silicone gasket

Optional power

3W
5W
7W

IP65

IK08





LED WALL WASHER LIGHT

How to provide the uniform indirect lighting and decorate the wall? This is what a led wall washer for.

Brighten, enhance, and add visual interest and draws attention to a specific or large area. It's designed with different options, such as RGB, RGBW color and single color, with DMX512 control system. LED wall washer is an ideal product for outdoor building outline lighting or bridge lighting.

QK-XQD-01




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- Material: Aluminum + Tempered glass
- CCT: 3000K~6000K/RGB/RGBW

Power	A	B	C
12W	240	55	60

IP65

IK08



QK-XQD-02




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- Material: Aluminum + Tempered glass
- CCT: 3000K~6000K/RGB/RGBW

Power	A	B	C
48W	1000	120	75

IP65

IK08



QK-XQD-03



QK-XQD-04




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- Material: Aluminum + Tempered glass
- CCT: 3000K~6000K/RGB/RGBW

IP65

IK08

Power	A	B	C
24W	920	92	40
36W	1000	110	50
48W	1000	140	68

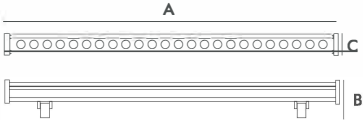


Parameter

- Input voltage: AC85~265V/DC24V
- LED: COB
- Material: Aluminum + Tempered glass
- CCT: 3000K~6000K/RGB/RGBW

IP65

IK08

Power	A	B	C
12W	920	58	38
18W	920	58	32
24W	980	60	42
24W	920	80	35

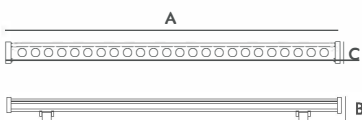

QK-XQD-05



QK-XQD-06




Parameter

- Input voltage: AC85~265V/DC24V
- LED: COB
- Material: Aluminum + Tempered glass
- CCT: 3000K~6000K/RGB/RGBW

Power	A	B	C
48W	1000	45	52
72W	1000	45	75

IP65

IK08

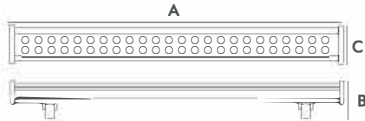


Parameter

- Input voltage: AC85~265V/DC24V
- LED: COB
- Material: Aluminum + Tempered glass
- CCT: 3000K~6000K/RGB/RGBW

Power	A	B	C
18W	1000	39	26
24W	1000	39	31

IP65

IK08

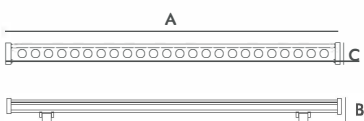



GARDEN LIGHT

QIKE offers you kinds of luminaire designs to bright the park and the garden, to meet different styles. No matter you are looking for traditional types or modern fashion types, you can always rely on our effective solution and high quality products in your budget.

QK-TYD-01



Parameter

- Input voltage: AC85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Finish color: Black/ Dark grey/ Light grey


Power	A	B
12W	Φ145*800	
20W	Φ145*1500	
20W	Φ145*2000	
30W	Φ145*2500	
30W	Φ145*3000	
30W	Φ145*3500	

IP65

IK08



QK-TYD-02

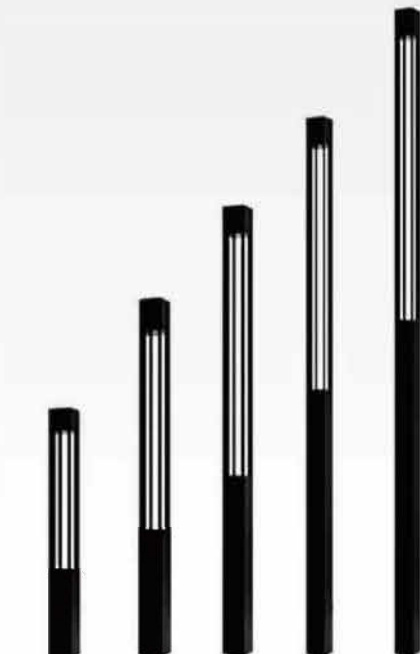

Parameter

- Input voltage: AC85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
20W	150*150*1500		
20W	150*150*2000		
30W	150*150*2500		
30W	150*150*3000		
30W	150*150*3500		

IP65

IK08



QK-TYD-03




Parameter

- Input voltage: AC85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Finish color: Black/ Dark grey/ Light grey

Power	A	B
10W	Φ145*800	
28W	Φ145*1500	
40W	Φ145*2000	
48W	Φ145*2500	
60W	Φ145*3000	

IP65 IK08



QK-CPD-01




Parameter

- Input voltage: AC85~265V
- LED: SMD
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Brand of LED chip: Bridgelux
- Finish color: Black/ Dark grey/ Light grey

Power	A	B
5W	180*590	
5W	180*820	

IP65 IK08



QK-CPD-02



Parameter

- Input voltage: AC85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Brand of LED chip: Bridgelux
- Finish color: Black/ Dark grey/ Light grey

Power	A	B
10W	145	600
10W	145	800

IP65

IK08



QK-CPD-03




Parameter

- Input voltage: AC85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Brand of LED chip: Bridgelux
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
7W	108	108	300
7W	108	108	600
7w	108	108	800

IP65

IK08



QK-CPD-04




Parameter

- Input voltage: AC85~265V
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Solar panel power: 3.5W
- Watt: 3W
- Lithium battery: 4.0Ah
- Working time: 13Hrs
- Finish color: Black/ Dark grey/ Light grey

Power	A	B
3W	200*350	
3W	200*600	
3W	200*800	

IP65



QK-CPD-05




Parameter

- Input voltage: AC85~265V
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Solar panel power: 4.2W
- Watt: 1.5W
- Lithium battery: 4.0Ah
- Working time: 13Hrs
- Finish color: Black/ Dark grey/ Light grey

Power	A	B
3W	230*300	

IP65




QK-CPD-06



- Parameter
- Input voltage: AC85~265V
 - LED: COB
 - Material: Die-cast aluminum
 - CCT: 3000K-6000K
 - Brand of LED chip: Bridgelux
 - Finish color: Black/ Dark grey/ Light grey

Power	A	B
5W	65*600	
5W	65*800	
2*5W	65*600	
2*5W	65*800	

IP65 IK08



QK-CPD-07



- Parameter
- Input voltage: AC85~265V
 - LED: SMD
 - Material: Die-cast aluminum
 - CCT: 3000K-6000K
 - Brand of LED chip: Bridgelux
 - Finish color: Black/ Dark grey/ Light grey

Power	A	B
5-7W	108*600	
5-7W	108*800	

IP65 IK08



QK-CPD-08




Parameter

- Input voltage: AC85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Brand of LED chip: Bridgelux
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
6W	40*90*700		

IP65

IK08



QK-CPD-09




Parameter

- Input voltage: AC85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Brand of LED chip: Bridgelux
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
5W	150*50*600		

IP65

IK08





DECK LIGHT

LED Deck Lights are available for both outdoor and indoor. It's a great way to focus distinct accent lighting and provide safety illumination to your steps or deck walkways.

QK-BJD-01

QK-BJD-02




Parameter

- Input voltage: AC85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 3000K-6000K
- Finish color: Black/ Dark grey/ Light grey

Power	A	B
2W	Φ100*35	
3W	Φ120*35	
4W	Φ150*40	

IP65

IK08





Parameter

- Input voltage: AC85~265V
- LED: COB
- Material: Die-cast aluminum
- CCT: 2700-3200K/6000-6500K
- Finish color: Black/ Dark grey/ Light grey

Power	A	B
3W	Φ95*54.5	

IP67

IK08



QK-BJD-03



Parameter

- Input voltage: AC85~265V
- LED: SMD
- Material: Aluminum
- CCT: 2700-3200K/6000-6500K
- How it works: Always lighting/Human body induction
- Finish color: Black/ Dark grey/ Light grey

Power	A	B	C
3W	86	86	32
3W	105	60	32
6W	210	60	32
6W	205	85	32
6W	160	160	32



5°




10



20



60°



IP65

IK08



A nighttime photograph of a park area. In the foreground, a wooden bench sits on a paved walkway, illuminated by a warm, low-profile light fixture. To the right, a small fountain with multiple jets of water is lit up. In the background, a large, modern building with a distinctive, illuminated, scale-like facade is visible. Further back, a city skyline with various skyscrapers is lit up against the dark night sky. Trees and shrubs are scattered throughout the park, some with their own lighting.

POOL LAMP

Installed under the water, its appearance is small and delicate, beautiful and generous. It's widely used in a park or fountain, for sure, it makes light and water glow against each other, reflecting the pleasing beauty.

QK-SCD-01

QK-SCD-02




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- Material: 304 Stainless steel +Tempered glass
- CCT: 3000K~6000K/RGB/RGBW

Power	A
3W	Φ80
6W	Φ120
9W	Φ145
12W	Φ160
18W	Φ175
24W	Φ190
36W	Φ210

IP68 IK08




Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- Material: Stainless steel + PC cover
- CCT: 3000K~6000K/RGB/RGBW

Power	A
6W	Φ180
9W	Φ235
12W	Φ235

IP68



QK-SCD-03



Parameter

- Input voltage: AC85~265V/DC24V
- LED: SMD
- Material: 304 Stainless steel + Tempered glass
- CCT: 3000K~6000K/RGB/RGBW

Power	A	B
6*1W	Φ110*H75	
6*1W	Φ130*H75	
9*1W	Φ160*H85	
12*1W	Φ180*H85	
18*1W	Φ200*H85	

IP68 IK08

